


# Enjoy

THE BENEFITS OF TREATED WATER



  
slimline

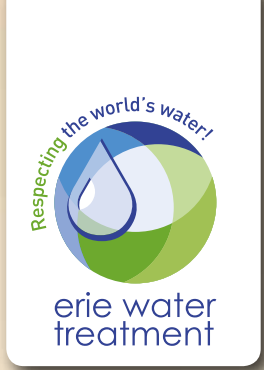

# Filter

WHOLEHOUSE

**ERIE WATER TREATMENT**  
Bannerlaan 83E,  
B-2280 Grobbendonk - Belgium  
T +32 (0)14 28 51 71  
infobelgium@eriewatertreatment.com  
[WWW.ERIE-SLIMLINE.COM](http://WWW.ERIE-SLIMLINE.COM)

**MEMBERSHIPS**



**CERTIFICATIONS**



## TECHNICAL SPECIFICATIONS

MODEL	SLI-WHF
Operating pressure min/max (bar)	2,0 / 8,3
Operating temperature min/max (°C)	2 / 48
Electrical connection (V/Hz)	230 / 50 <sup>(1)</sup>
Max. power consumption (VA)	8
Hydraulic connection inlet/outlet	1" BSP Male

<sup>(1)</sup> Supplied with 24V transformer

## PERFORMANCES<sup>(2)</sup>

MODEL	SLI-WHF		
FILTER MEDIA (Ltr)	12	26	44
Recommended max. service flow (m <sup>3</sup> /hr) <sup>(3)</sup>	1,0	1,2	1,4
Nominal backwash flow = flow to drain (Ltr/min)	19		
Rinse water usage per regeneration (Ltr) <sup>(4)</sup>	132		

<sup>(2)</sup> Indicative numbers, performances depending on operating conditions and water quality

<sup>(3)</sup> = continuous service flow rate; higher (up to x2) short-period peak flow rates are possible

<sup>(4)</sup> Varies with inlet pressure and drain line configuration

## DIMENSIONS & WEIGHTS

MODEL	SLI-WHF		
FILTER MEDIA (Ltr)	12	26	44
System depth (pressure tank & valve) (mm)	371		
System height (mm)	629	1065	1554
Weight (kg)	10,0	20,0	32,0

## FEATURES & BENEFITS

- Improve taste, color and odor of the water
- Filter out any particles larger than 40µm
- Fully automatic controller with microprocessor
- Easy programming

## ACCESSORIES

- Voltage transformer, 230-24V
- 1" BSP male in/out connection kit
- 3 mtr reinforced drain hose with 2 clamps
- Air gap with double drain connection.