


Enjoy

THE BENEFITS OF TREATED WATER



slimline

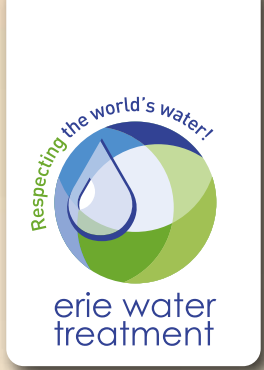

Water

SOFTENER

ERIE WATER TREATMENT
Bannerlaan 83E,
B-2280 Grobbendonk - Belgium
T +32 (0)14 28 51 71
infobelgium@eriewatertreatment.com
WWW.ERIE-SLIMLINE.COM

MEMBERSHIPS



CERTIFICATIONS



TECHNICAL SPECIFICATIONS

| MODEL | SLI-BBS-ECO- | | | SLI-BBS-ECO- | |
|------------------------------------|--|----|----|--------------|----|
| RESIN (Ltr) | 11 | 14 | 30 | 11 | 24 |
| Operating pressure min/max (bar) | 1,4 / 8,3 | | | | |
| Operating temperature min/max (°C) | 2 / 48 | | | | |
| Electrical connection (V/Hz) | 100-230/24VDC - 50/60Hz ⁽¹⁾ | | | | |
| Max. power consumption (VA) | 5,6 | | | 6,5 | |
| Hydraulic connection inlet/outlet | 3/4" BSP Male | | | | |

⁽¹⁾ Supplied with 24V transformer

PERFORMANCES⁽²⁾

| MODEL | SLI-BBS-ECO- | | | SLI-BBS-ECO- | |
|--|--------------|-----|-----|--------------|-----|
| RESIN (Ltr) | 11 | 14 | 30 | 11 | 24 |
| Nominal exchange capacity (m ³ x°f) | 50 | 63 | 153 | 50 | 122 |
| Nominal exchange capacity (m ³ x°d) | 28 | 35 | 87 | 28 | 70 |
| Salt usage per regeneration (kg) ⁽³⁾ | 1,4 | 1,8 | 3,8 | 1,4 | 3,0 |
| Service flow rate @1 bar pressure drop (m ³ /hr) | 2,3 | 2,3 | 2,0 | 2,3 | 2,1 |
| Recommended maximum service flow (m ³ /hr) ⁽⁴⁾ | 1,1 | 1,4 | 3,0 | 1,1 | 2,4 |
| Rinse water usage per regeneration (Ltr) ⁽³⁾⁽⁵⁾ | 61 | 64 | 144 | 110 | 186 |

⁽²⁾ Indicative numbers, performances depending on operating conditions and water quality

⁽³⁾ For Eco/Eco+ configuration: maximum salt/water usage as brining is proportional (minimum of 60%)

⁽⁴⁾ Flow rate at which softening process is still executed adequately

DIMENSIONS & WEIGHTS

| MODEL | SLI-BBS-ECO- | | | SLI-BBS-ECO- | |
|---|--------------|------|------|--------------|------|
| RESIN (Ltr) | 11 | 14 | 30 | 11 | 24 |
| Brine tank width x depth (mm x mm) | 290x310 | | | 290x310 | |
| Brine tank height (mm) | 435 | 435 | 905 | 435 | 905 |
| System depth (pressure tank & valve) (mm) | 278 | 278 | 278 | 278 | 278 |
| System depth, including bypass (mm) | 380 | 380 | 380 | 380 | 380 |
| System height (mm) | 545 | 545 | 950 | 545 | 950 |
| Weight (kg) | 15,5 | 18,5 | 35,5 | 16,0 | 30,0 |
| Weight, including bypass (kg) | 16,0 | 19,0 | 36,0 | 16,5 | 30,5 |
| Maximum salt storage capacity (kg) | 30 | 30 | 65 | 30 | 65 |

! Eco+ configuration: recommended for treatment of non-municipal water.

FEATURES & BENEFITS

- Multilingual software
- 2-line display with backlight
- Easy programming
- Salt level alarm which visually informs you when the salt needs to be checked
- Proportional brining
- Exceptionally low rinse water usage per regeneration

ACCESSORIES

- Plastic bypass, with incorporated mixing valve
- Voltage transformer, 230-24V
- 3/4 BSP male in/out connection kit
- 3 mtr reinforced drain hose with 2 clamps
- Air gap with double drain connection.